

3,1W / 240lm / 4000K / On/Off / Flood 56° /  
39x39mm

63559



Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



4000K

**Light Source**

**Luminaire**

**Power**

**3,1W**

**4W**

**Flux**

**280lm**

**240lm**

**Efficiency**

**90lm/W**

**60lm/W**

**LOR**


**-**

**86%**

**UGR**

**-**

**<16**



**Beam angle**  
**Flood 56°**

**Application**

**Weight**

mm

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

**Mandatory**

**59048** Trimless accessory (12.5mm ceilings)

140x18mm


**59049** Trimless accessory (15mm ceilings)

140x20mm

**59050** Trimless accessory (25mm ceilings)

140x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

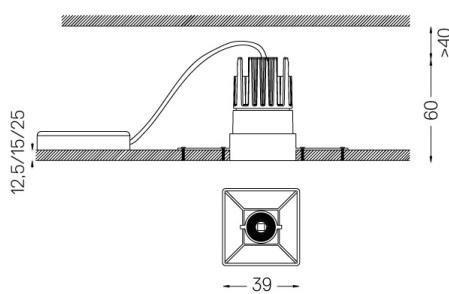

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class G

Model Identifier 4053560313L