


3,1W / 240lm / 4000K / On/Off / Flood 56° / 39x39mm

63559



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.


Lightcore optics for defined and perfectly controlled beam of light.

Recessing accessory supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power	3,1W		4W
Flux	280lm		240lm
Efficiency	90lm/W		60lm/W
LOR	-		86%
UGR	-		<16




Beam angle  
Flood 56°

Application



Weight

mm

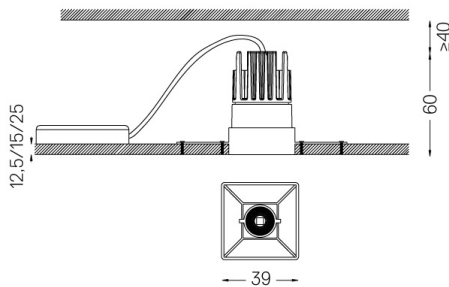

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59048** Trimless accessory (12.5mm ceilings) 140x18mm
- 59049** Trimless accessory (15mm ceilings) 140x20mm
- 59050** Trimless accessory (25mm ceilings) 140x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560313L

## One Square Trimless

Trimless accessory (12.5mm  
ceilings)


59048



52x52



Trimless accessory One 45x45.  
For 12.5mm ceilings.

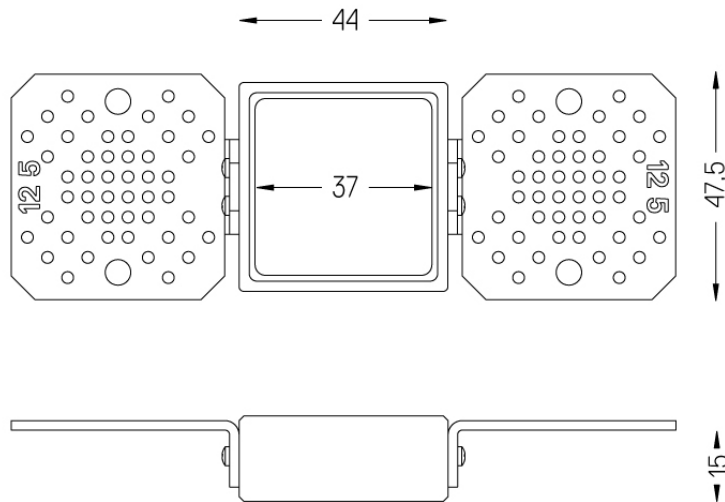

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

## One Square Trimless

Trimless accessory (15mm  
ceilings)


59049



52x52



Trimless accessory One 45x45.  
For 15mm ceilings.

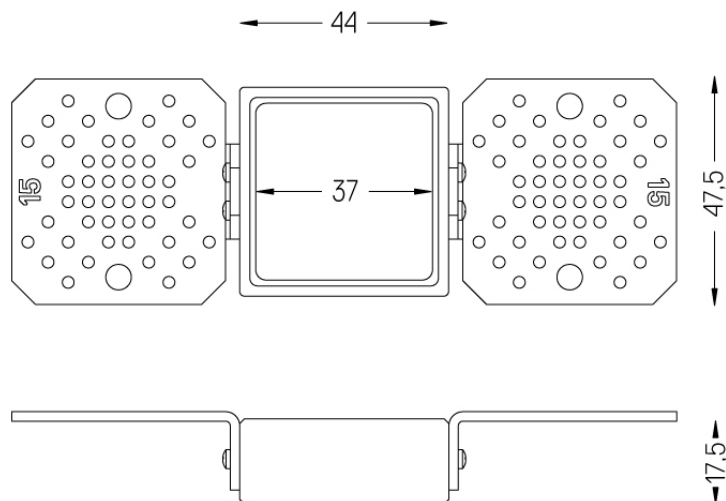

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

## One Square Trimless

Trimless accessory (25mm  
ceilings)

59050



52x52



Trimless accessory One 45x45.  
For 25mm ceilings.

Weight  
0,01Kg

Finishes  
○ .01 White / RAL 9010

