

3,1W / 210lm / 4000K / DALI / Medium 40° /  
39x39mm

63560



Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



4000K

**Light Source**

**Luminaire**

**Power**

**3,1W**

**4W**

**Flux**

**280lm**

**210lm**

**Efficiency**

**90lm/W**


**53lm/W**

**LOR**

**75%**

**UGR**

**<10**




**Beam angle**  
**Medium 40°**



**Weight**

mm

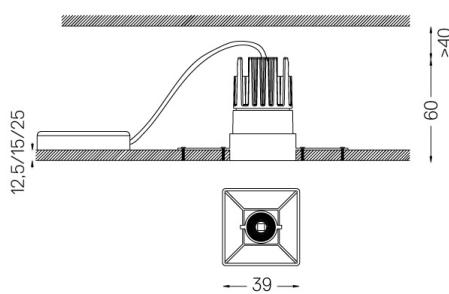

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

**Mandatory**

**59048** Trimless accessory (12.5mm ceilings)

140x18mm

**59049** Trimless accessory (15mm ceilings)

140x20mm

**59050** Trimless accessory (25mm ceilings)

140x30mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560313L