

# O/M

## One Adjustable

5,6W / 410lm / 2700K / On/Off / Medium  
40° / ø60mm

63563



Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Orientable by 20° horizontal rotation.  
Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



2700K

**Light Source**

**Luminaire**

**Power**

**5,6W**

**7W**

**Flux**

**460lm**

**410lm**

**Efficiency**

**82lm/W**

**59lm/W**

**LOR**


-

**89%**

**UGR**

-

**<19**



**Beam angle**  
**Medium 40°**



**Weight**  
**0,53Kg**


mm

Ø54

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

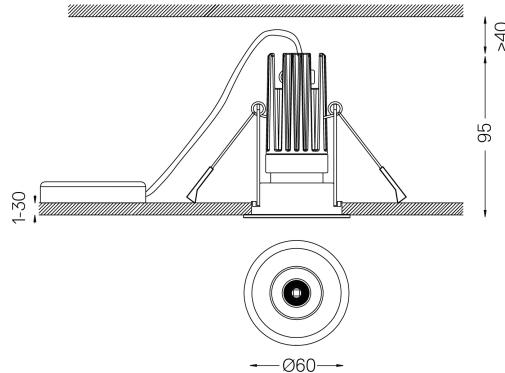

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560312H