

## One Adjustable Trimless

5,6W / 200lm / 2700K / DALI / Spot 15° / e54mm

63576



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.

Orientable by 20° horizontal rotation and 355° vertical rotation.


Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.

Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power	5,6W		7W
Flux	440lm		200lm
Efficiency	79lm/W		29lm/W
LOR	-		45%
UGR	-		<10




Beam angle  
Spot 15°

Application



Weight  
0,58Kg

mm

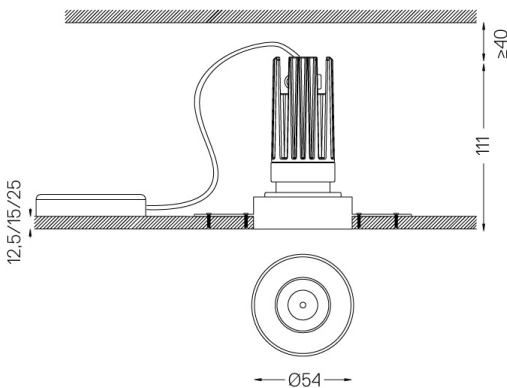

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59039** Trimless accessory (12.5mm ceilings) 155x18mm
- 59040** Trimless accessory (15mm ceilings) 155x20mm
- 59041** Trimless accessory (25mm ceilings) 155x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560312H

## One Adjustable Trimless

Trimless accessory (12.5mm  
ceilings)

59039


1 mm

Ø65



Trimless accessory One ø60  
For 12.5mm ceilings.

Weight  
0,01Kg

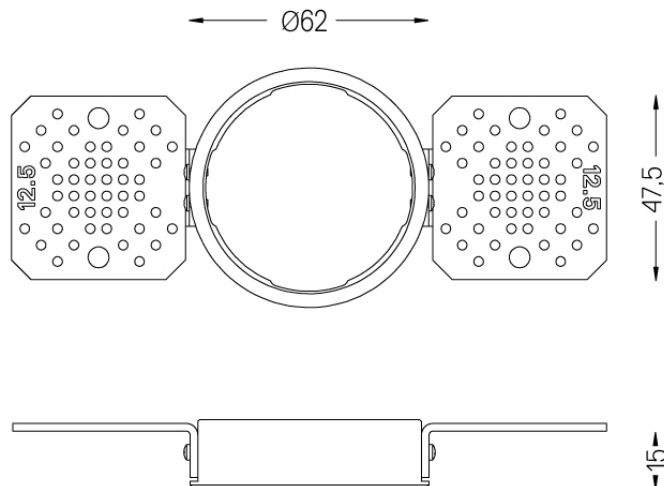

## One Adjustable Trimless

Trimless accessory (15mm  
ceilings)

59040




Ø65



Trimless accessory One ø60  
For 15mm ceilings.

Weight  
0,01Kg

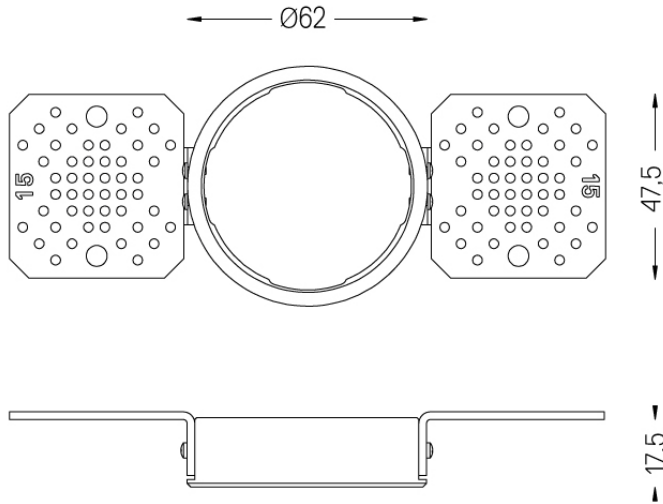

## One Adjustable Trimless

Trimless accessory (25mm  
ceilings)

59041



Ø65



Trimless accessory One ø60  
For 25mm ceilings.

Weight  
0,01Kg

