

One Adjustable Trimless

5,6W / 215lm / 4000K / On/Off / Spot 15° / e54mm

63582



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.

Orientable by 20° horizontal rotation and 355° vertical rotation.


Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.

Recessing accessory supplied separately.

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power	5,6W		7W
Flux	480lm		215lm
Efficiency	86lm/W		31lm/W
LOR	-		45%
UGR	-		<10




Beam angle
Spot 15°

Application



Weight
0,58Kg

mm

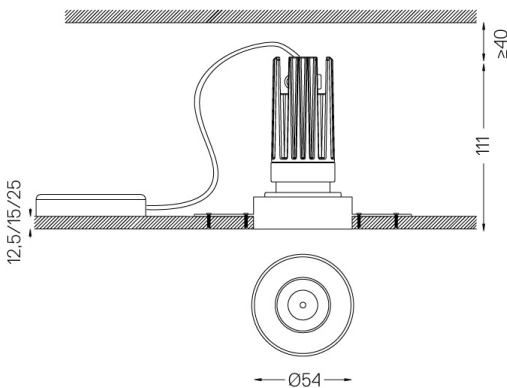

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59039** Trimless accessory (12.5mm ceilings) 155x18mm
- 59040** Trimless accessory (15mm ceilings) 155x20mm
- 59041** Trimless accessory (25mm ceilings) 155x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G Model Identifier 4053560313H

One Adjustable Trimless

Trimless accessory (12.5mm
ceilings)

59039


1 mm

Ø65



Trimless accessory One ø60
For 12.5mm ceilings.

Weight
0,01Kg

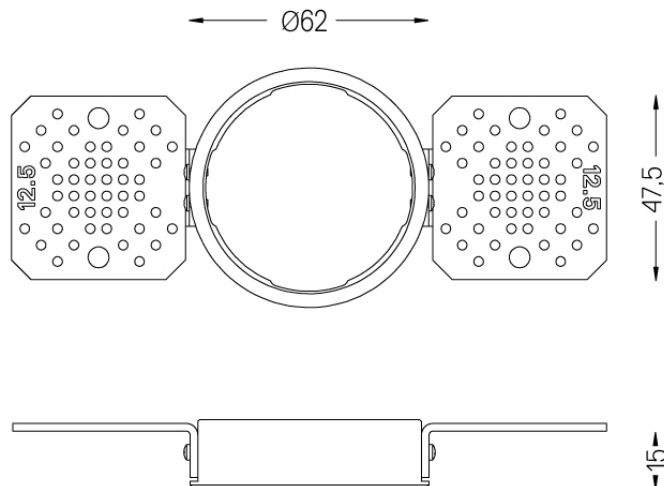

One Adjustable Trimless

Trimless accessory (15mm
ceilings)

59040




Ø65



Trimless accessory One ø60
For 15mm ceilings.

Weight
0,01Kg

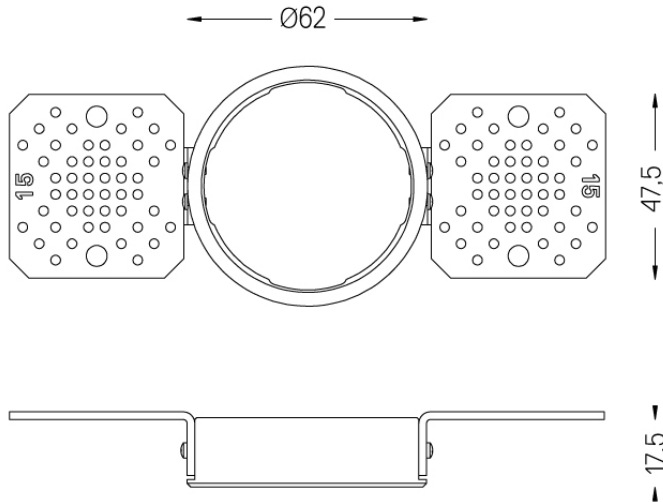

One Adjustable Trimless

Trimless accessory (25mm
ceilings)

59041



Ø65



Trimless accessory One ø60
For 25mm ceilings.

Weight
0,01Kg

