



## One Surface/Pendant

9,8W / 550lm / 2700K / DALI / Spot 15° /  
ø85mm

63593




Design: O/M + Bartenbach GmbH  
Surface/Pendant luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.  
Fitting accessories ordered separately

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz




LED	2700K	Light Source	Luminaire
Power	9,8W	12,3W	
Flux	955lm	550lm	
Efficiency	97lm/W	45lm/W	
LOR	-	58%	
UGR	-	<10	



Beam angle  
Spot 15°



Weight  
0.58Kg

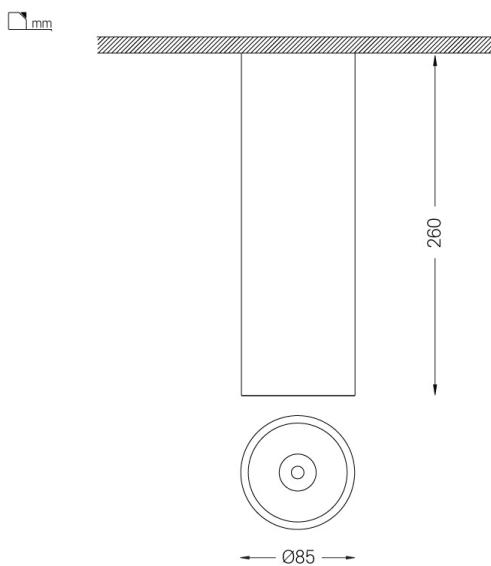

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Mandatory

59051 Accessory for pendant installation  
ø80x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Data according to regulations  
2019/2020/EU supplemented by 2021/341 |2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560245H