



One Surface/Pendant

4,5W / 430lm / 2700K / DALI / Flood 56° /
ø85mm

63596




Design: O/M + Bartenbach GmbH
Surface/Pendant luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.
Fitting accessories ordered separately


LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz




LED	2700K	Light Source	Luminaire
Power	4,5W	5,8W	
Flux	480lm	430lm	
Efficiency	107lm/W	75lm/W	
LOR	-	90%	
UGR	-	<16	



Beam angle
Flood 56°



Weight
0,53Kg

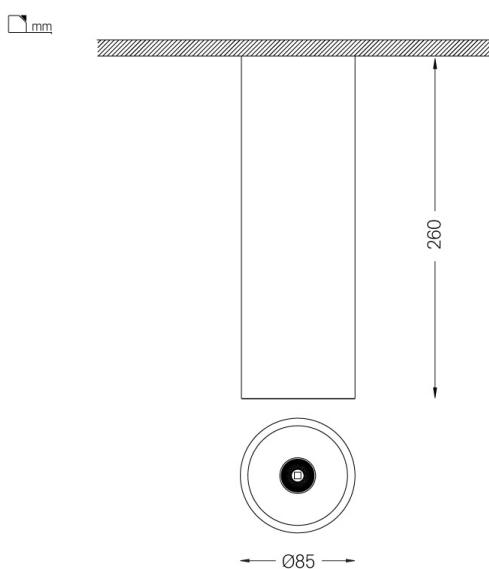

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

59051 Accessory for pendant installation
ø80x35mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 |2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class F
Model Identifier 2053560245L