



## One Surface/Pendant

4,5W / 470lm / 3000K / On/Off / Flood 56° /  
ø85mm

63602




Design: O/M + Bartenbach GmbH  
Surface/Pendant luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.  
Fitting accessories ordered separately

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz




	3000K	Light Source	Luminaire
Power	4,5W	5,8W	
Flux	520lm	470lm	
Efficiency	116lm/W	81lm/W	
LOR	-	90%	
UGR	-	<16	



Beam angle  
Flood 56°



Weight  
0,53Kg

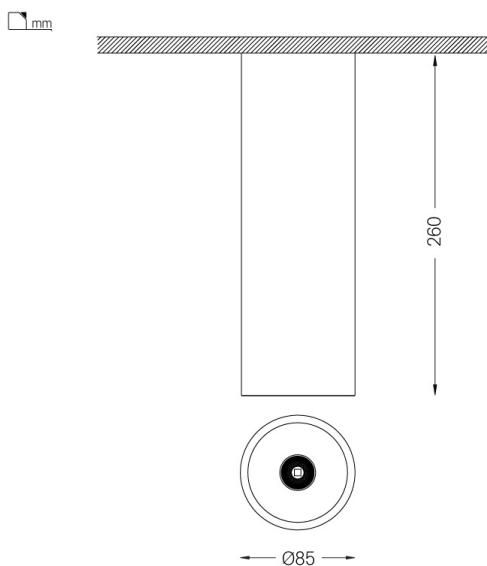

### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

### Mandatory

59051 Accessory for pendant installation  
ø80x35mm

### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier 2053560257L