

4,5W / 360lm / 4000K / DALI / Spot 15° /
ø95mm

63747



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with die-cast aluminium body and heat sink.

Orientable by 30° on the horizontal axis and 355° on the vertical axis.

Reflector built based on micro surfaces with complex geometry coated with aluminium alloy, creating a high-gloss, entirely mirrored surface. Accurate reflector for a defined and controlled beam of light, achieving the maximum efficiency.

Reduced height <67mm.

Recessing accessory for trimless version supplied separately.

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz

4000K

Light Source

Luminaire


Power **4,5W** **5,8W**

Flux **620lm** **360lm**

Efficiency **138lm/W** **62lm/W**

LOR **-** **58%**

UGR **-** **<10**



Beam angle
Spot 15°




Weight
0,42Kg

mm

Ø90 (trim version)

Finishes

- .01 White / RAL 9010**
- .02 Black / RAL 9005**
- .21 Black+White**

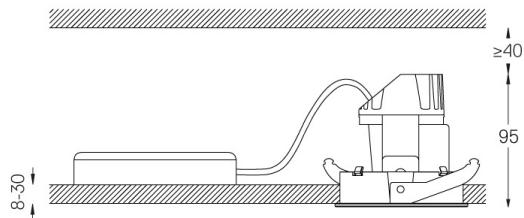


Optional

59015 Accessory 12,5mm ceilings (flush installation)
150x101x20mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com



Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class E
Model Identifier 2053560247L