

56+70W* / 6000+4400lm* / 2200K-5000K /
DALI / Wide flood 76° / batwing / 2920mm

63771

Minimum quantity requested for purchase orders
(>200m)




Design: OM + Bartenbach GmbH
Pendant direct and indirect luminaire with housing made of aluminium in matte finish.
Aluminium anodised end caps with matt finish.
Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
Indirect light: Linear lenses for batwing effect protected by a transparent polycarbonate diffuser.
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




| LED | 2200K-5000K | Light Source | Luminaire |
|------------|-------------|--------------|--------------|
| Power | | 56+70W* | 66+80W* |
| Flux | | 7500+5500lm* | 6000+4400lm* |
| Efficiency | | 103lm/W | 70lm/W |
| LOR | | - | 80% |
| UGR | | - | <19 |

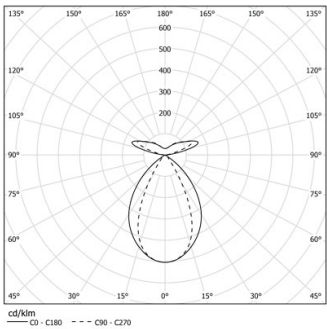

Beam angle
Wide flood 76° /
batwing



Weight
4,7Kg

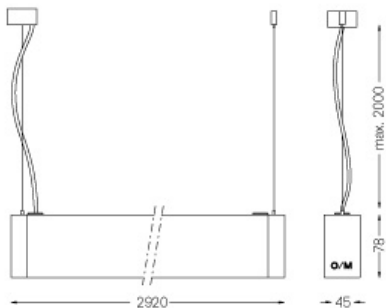

Finishes
○ .04 Matt White
● .05 Matt Black

Mandatory
59054 Pendant direct/indirect fitting accessory
56051 Clear Base DALI
ø60x35mm