
O/M

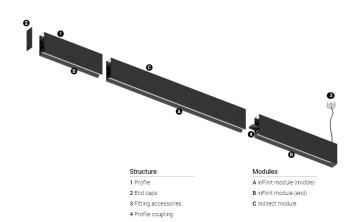

inFinit Made-to-measure

27+56W / 2720+2560lm / 3000K / DALI / Flood 64° / batwing / 2304mm

63776

Product timing available by request

Design: OM + Bartenbach GmbH

Pendant direct and indirect module with housing
made of aluminium with electrostatic 100% polyester
paint.

Direct light: Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.


Indirect light: Linear lenses for batwing effect protected by a transparent polycarbonate diffuser.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam Power supply included. IP20 | 230Vac | 50/60Hz



-	•	
•	-	

Light Source	Luminaire
27+56W	32,9+65,9W
3360+3200lm	2720+2560lm
79lm/W	53lm/W
-	80%
-	<16
	27+56W 3360+3200lm 79lm/W



Beam angle Flood 64° / batwing

Application



Weight

Finishes

O .04 Matt White

.05 Matt Black

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com



mm