
O/M

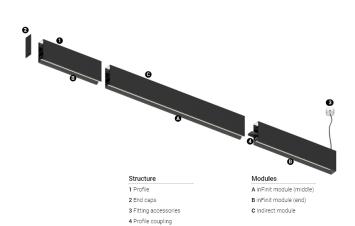

inFinit Made-to-measure

33+70W / 3400+3200lm / 3000K / DALI / Wide flood 76° / batwing / 2880mm

63779

Product timing available by request

Design: OM + Bartenbach GmbH

Pendant direct and indirect module with housing
made of aluminium with electrostatic 100% polyester
paint.


Direct light: Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

Indirect light: Linear lenses for batwing effect protected by a transparent polycarbonate diffuser.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam Power supply included. IP20 | 230Vac | 50/60Hz



1000K			
	Light Source	Luminaire	
Power	33+70W	38,8+82,4W	
Flux	4200+4000lm	3400+3200lm	
Efficiency	80lm/W	54lm/W	
LOR	-	80%	
UGR	-	<19	
-			



Beam angle
Wide flood 76° /
batwing

Application

Weight

.04 Matt White.05 Matt Black

Finishes

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com



mm