

inVision45 Surface/Pendant

27W / 2600lm / 4000K / On/Off / Flood 52°
/ 1211mm

63974



Design: O/M + Bartenbach GmbH

Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.


Aluminium anodised end caps with electrostatic 100% polyester paint with textured-finish.

Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision45 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source. Fitting accessories for pendant version ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



| LED | 4000K | Light Source | Luminaire |
|------------|---------|--------------|-----------|
| Power | 27W | | 32,9W |
| Flux | 3440lm | | 2600lm |
| Efficiency | 127lm/W | | 79lm/W |
| LOR | - | | 76% |
| UGR | - | | <13 |




Beam angle
Flood 52°

Application



Weight
2,5Kg

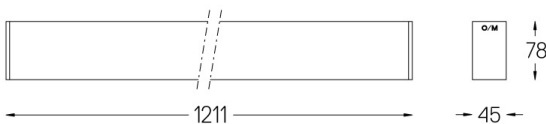

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

54036 Pendant direct fitting accessory

54034 Clear Base

ø60x35mm