

39W / 2730lm / 2700K / DALI / Flood 52° / 900mm

64027



Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules


- A inVision Module

Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power	39W	39W	45,9W
Flux	3600lm	3600lm	2730lm
Efficiency	92lm/W	92lm/W	59lm/W
LOR	-	-	76%
UGR	-	-	<16

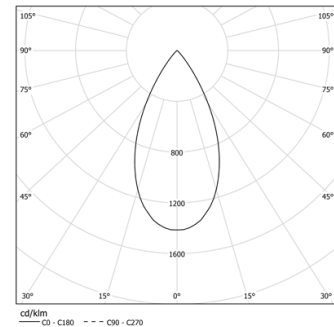


Beam angle
Flood 52°

Application



Weight
0,6Kg

mm

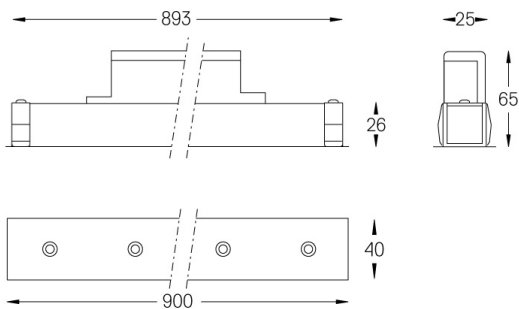

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com