


39W / 2730lm / 2700K / DALI / Flood 52° /
900mm

64027

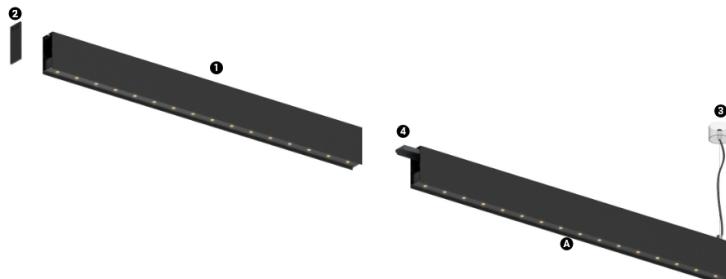

Structure
1 Profile
2 End caps
3 Fitting accessories
4 Profile coupling

Modules
A inVision Module

Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




2700K

Light Source

Luminaire

Power	39W	45,9W
Flux	3600lm	2730lm
Efficiency	92lm/W	60lm/W
LOR	-	76%
UGR	-	<16



Beam angle
Flood 52°

Application



Weight
0,55Kg

mm

Finishes

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

