


39W / 2820lm / 3000K / DALI / Medium 31° /
900mm

64033

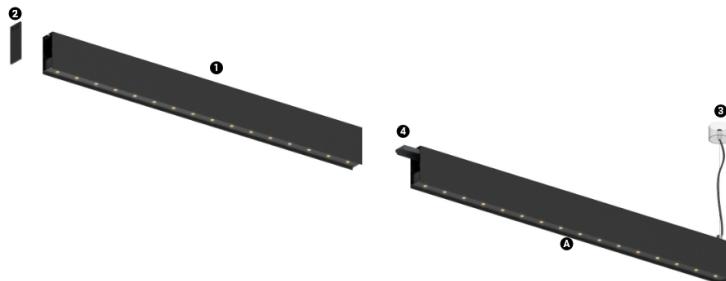

Structure
1 Profile
2 End caps
3 Fitting accessories
4 Profile coupling

Modules
A inVision Module

Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



3000K

Light Source

Luminaire


Power **39W** **45,9W**

Flux **3870lm** **2820lm**

Efficiency **99lm/W** **61lm/W**

LOR - **73%**

UGR - **<10**



Beam angle
Medium 31°

Application

Weight
0,55Kg

mm

Finishes

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

