


90W / 3400lm / 2700K / On/Off / Diffuse
indirect / 2895mm

64050

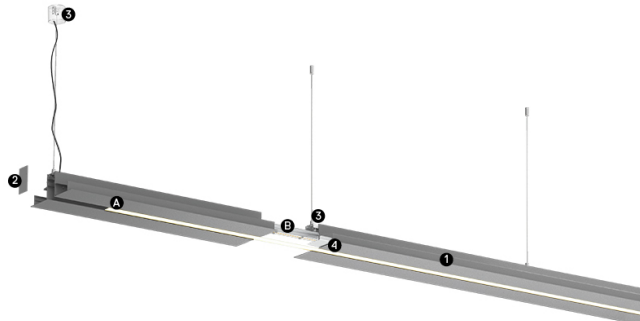

Structure
 1 Profile
 2 End caps
 3 Fitting accessories
 4 Profile coupling

Diffuser
 A Polycarbonate frost
 diffuser
Light Source
 B LED Modules

Design: Eduardo Souto de Moura
 MGB Pendant Indirect module with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser with user friendly clipping system.

Steel end caps with textured electrostatic 100% polyester paint.

Frosted acrylic diffuser for direct light and indirect light.

Fitting accessories supplied separately.


LED CRI>90 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power	90W	130W	
Flux	8500lm	3400lm	
Efficiency	94lm/W	26lm/W	
LOR	-	40%	
UGR	-	<25	




Beam angle
Diffuse indirect

Application



Weight
14Kg

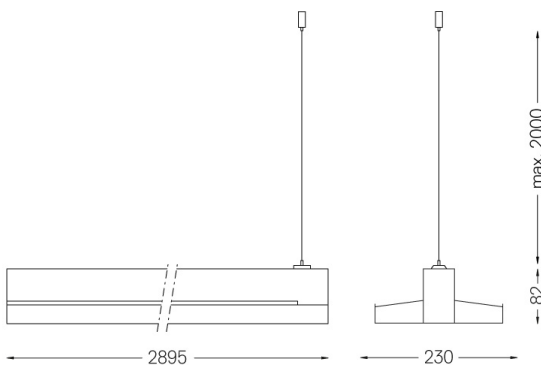

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

- 54034 Clear base
Ø60x35mm
- 54080 Aluminium base
Ø60x37mm