

63W / 3300lm / 3000K / On/Off / Diffuse
indirect / 1485mm

64105



Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser

- A Polycarbonate frost diffuser

Light Source

- B LED Modules

Design: Eduardo Souto de Moura
MGB Pendant Indirect module with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.
Frosted acrylic diffuser with user friendly clipping system.
Steel end caps with textured electrostatic 100% polyester paint.
Frosted acrylic diffuser for indirect light.
Three-phase track (On/Off or DALI) for installing spotlights.
Fitting accessories supplied separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power	63W	8200lm	90W
Flux	3300lm	130lm/W	37lm/W
Efficiency	-	-	40%
LOR	-	-	<25
UGR	-	-	-




Beam angle
Diffuse indirect

Application



Weight
7Kg

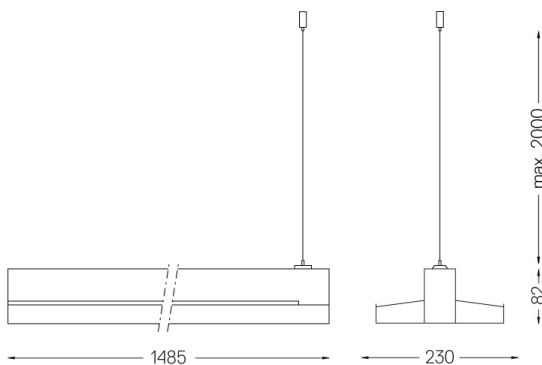

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

- 54034 Clear base
Ø60x35mm
- 54080 Aluminium base
Ø60x37mm