


45W / 2300lm / 3000K / DALI / Diffuse  
indirect / 1411mm

64132

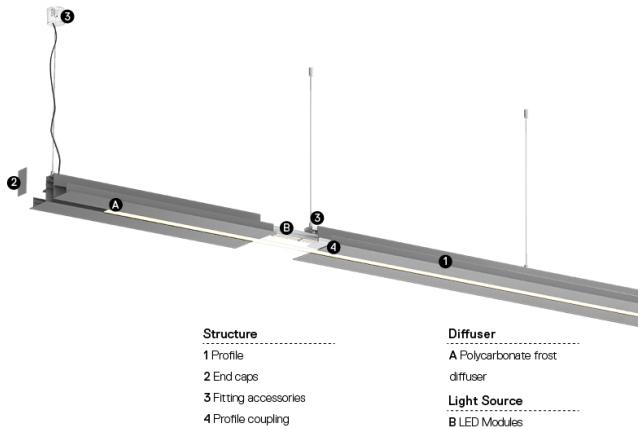

Design: Eduardo Souto de Moura  
MGB Pendant Indirect module with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.  
Frosted acrylic diffuser with user friendly clipping system.  
Steel end caps with textured electrostatic 100% polyester paint.  
Frosted acrylic diffuser for indirect light.  
Three-phase track (On/Off or DALI) for installing spotlights.  
Fitting accessories supplied separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



**3000K**

**Light Source**

**Luminaire**

**Power**

**45W**

**65W**

**Flux**

**5750lm**

**2300lm**

**Efficiency**

**128lm/W**

**35lm/W**


**LOR**

**40%**

**UGR**

**<25**

**Beam angle**  
**Diffuse indirect**



**Application**



**Weight**  
**7Kg**

**mm**

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

**Mandatory**

- 56051 Clear base DALI  
Ø60x35mm  
54081 Aluminium base DALI  
Ø60x37mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

