


28W / 2600lm / 3000K / DALI / Prismatic /  
1119mm

64381

 Code no longer in production

Design: O/M  
LED light source with good colour consistency and  
long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

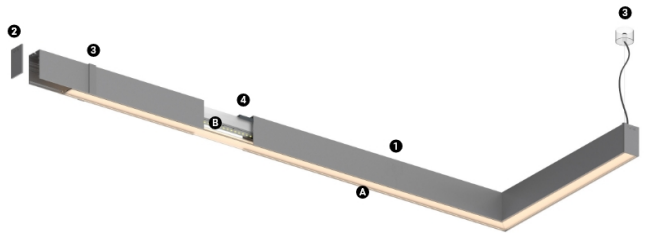


- Structure**

  - 1 Profile
  - 2 End caps
  - 3 Fitting accessories
  - 4 Profile coupling
- Diffuser**

  - A Polycarbonate frost diffuser

**Light Source**

  - B LED Modules

 3000K	Light Source	Luminaire
Power	28W	32W
Flux	4440lm	2600lm
Efficiency	159lm/W	81lm/W
LOR	-	59%
UGR	-	<25


Beam angle  
Prismatic

Application



Weight  
0,57Kg

Comming soon

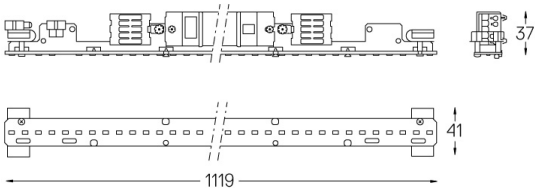

Finishes

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)  
Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: [support@om-light.com](mailto:support@om-light.com)