

5,6W / 200lm / 3000K / DALI / Spot 16° /  
ø45mm

64536


Design: O/M + Bartenbach GmbH

Track-mounted spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish. Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam. Orientable by 150° horizontal rotation and 330° vertical rotation. Driver included.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Driver included  
IP20 | 48Vdc




| LED        | 3000K  | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power      | 5,6W   |              | 7W        |
| Flux       | 440lm  |              | 200lm     |
| Efficiency | 79lm/W |              | 29lm/W    |
| LOR        | -      |              | 45%       |
| UGR        | -      |              | <10       |




Beam angle  
Spot 16°

Application



Weight  
0,27Kg

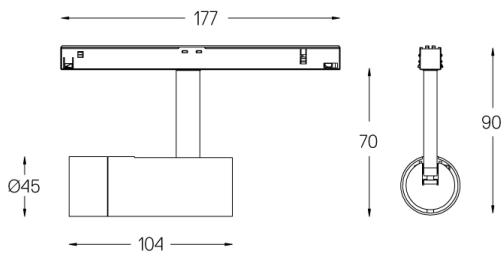

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

- 59072 1/4 CTO  
ø35x1,1mm
- 59073 1/2 CTO  
ø35x1,1mm
- 59074 Louvre  
ø35x2mm
- 59075 Soft diffuser  
ø35x2mm