

33W / 3965lm / 3000K / On/Off / Diffuse /  
ø550mm

64559


Design: O/M  
 Recessed luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions.  
 Frosted acrylic diffuser with perfect light uniformity.  
 Recessing accessories supplied separately.



LED: CRI>80 />50.000h, L80/B10 / 3-step MacAdam  
 Power supply included.  
 IP43 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power	33W	38,8W	
Flux	5670lm	3965lm	
Efficiency	172lm/W	102lm/W	
LOR	-	70%	
UGR	-	<25	





Beam angle  
Diffuse

Application

Weight  
6,1Kg

□ mm Ø 0557

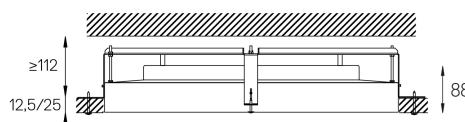

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

59078 Recessed fitting accessory  
Ø598x698x114

Recessed accessory for different ceiling heights under request

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains light sources of efficiency class C  
 Model Identifier 89603016