

21W / 2185lm / 3000K / DALI / Diffuse /
ø400mm

64561


Design: O/M
 Recessed luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions.
 Frosted acrylic diffuser with perfect light uniformity.
 Recessing accessories supplied separately.



LED: CRI>80 />50.000h, L80/B10 / 3-step MacAdam
 Power supply included.
 IP43 | 230Vac | 50/60Hz




	3000K	Light Source	Luminaire
Power	21W	26W	
Flux	3230lm	2185lm	
Efficiency	154lm/W	84lm/W	
LOR	-	68%	
UGR	-	<25	



Application

Weight
4,5Kg

mm 0407

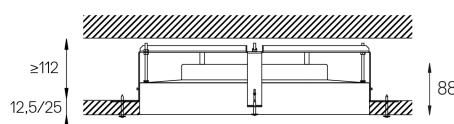

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory
 59077 Recessed fitting accessory
 Ø398x498x114mm

For the specific supply of "DALI 2" drivers, please contact:
 support@om-light.com
 Recessed accessory for different ceiling heights under request

Data according to regulations
 2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
 supplemented by 2021/340/EU Energy Consumption Labelling
 Ordinance. This product contains a light source of efficiency class D
 Model Identifier 89603355

