

33W / 4085lm / 4000K / DALI / Diffuse /  
ø550mm

64568


Design: O/M  
 Recessed luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions.  
 Frosted acrylic diffuser with perfect light uniformity.  
 Recessing accessories supplied separately.



LED: CRI>80 />50.000h, L80/B10 / 3-step MacAdam  
 Power supply included.  
 IP43 | 230Vac | 50/60Hz



	<b>4000K</b>	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>33W</b>	<b>38,8W</b>	
<b>Flux</b>	<b>5840lm</b>	<b>4085lm</b>	
<b>Efficiency</b>	<b>177lm/W</b>	<b>105lm/W</b>	
<b>LOR</b>	-	<b>70%</b>	
<b>UGR</b>	-	<b>&lt;25</b>	





Beam angle  
Diffuse

Application

Weight  
6,1Kg

□ mm Ø 0557

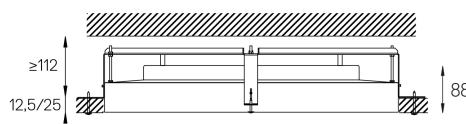

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

**59078** Recessed fitting accessory  
Ø598x698x14

For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)  
 Recessed accessory for different ceiling heights under request

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains light sources of efficiency class C  
 Model Identifier 89603017