

66W / 9030lm / 3000K / DALI / Diffuse /  
ø850mm

64587





Design: O/M

Pendant luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions. Frosted acrylic diffuser with perfect light uniformity. Suspension system with millimetric height adjustment ordered separately. Power supply base made of clear polycarbonate, clear power cable (5x0,75mm<sup>2</sup>) and steel suspension cables (1,2mm) with millimetric height adjustment system supplied separately.

LED: CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP43 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		66W	77,6W
Flux		11130lm	9030lm
Efficiency		169lm/W	116lm/W
LOR		-	81%
UGR		-	<25

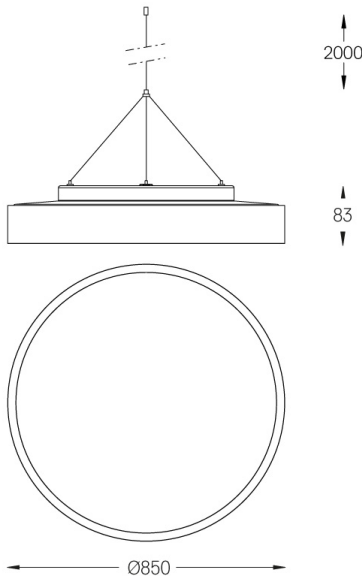

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

#### Mandatory

59080 Pendant fitting accessory  
56051 Clear Base DALI  
ø60x35mm


For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class D  
Model Identifier 89603018

Pendant fitting accessory

59080

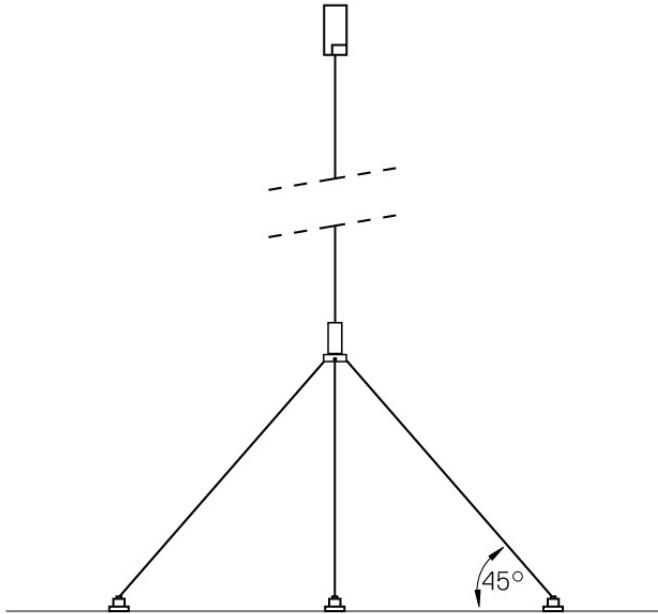


Sky pendant fitting accessory

## Sky Pendant

Clear Base DALI

56051

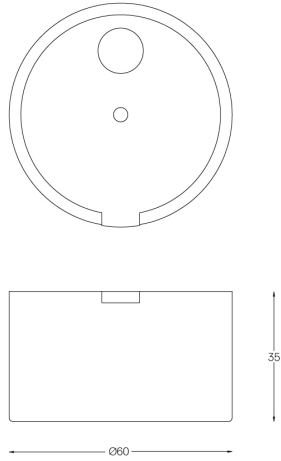

DALI (5x0,75mm<sup>2</sup>). Includes:  
One clear polycarbonate power supply base (IP20).  
One clear power cable (2m).  
One clear power supply base must be applied every 30m (ø60x35mm)  
Steel cable ordered separately