



Design: O/M

Ceiling-recessed luminaire made of aluminium die-cast.


Recessing system with spring clips.

Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 180mA / 100mA



LED	2700K	Light Source	Luminaire
Power		6,7W / 3,7W	6,7W / 3,7W
Flux		655lm / 365lm	530lm / 295lm
Efficiency		98lm/W	79lm/W
LOR		-	81%
UGR		-	<16




Beam angle  
Spot 20°

Application



Weight  
0.21Kg

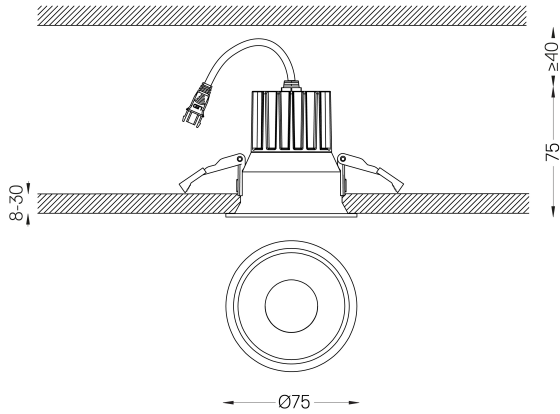

## Finishes

- .04 Matt White
- .05 Matt Black

## Mandatory

- 59093** Driver On/Off [180mA]  
147x43x30mm
- 59092** Driver On/Off [100mA]  
92x28x21mm
- 59095** Driver DALI [180mA]  
144x30x21mm
- 59094** Driver DALI [100mA]  
144x30x21mm
- 59097** Driver Phase-Cut [180mA]  
102x49x29mm
- 59096** Driver Phase-Cut [100mA]  
122x41x23mm
- 59099** Driver 1-10V [180mA]  
130x30x20mm
- 59098** Driver 1-10V [120mA]  
130x30x20mm

## Optional

- 59069** Flush accessory (12.5mm ceilings)  
176x17mm
- 59070** Flush accessory (15mm ceilings)  
176x19,5mm
- 59071** Flush accessory (25mm ceilings)  
176x29,5mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.

## Data according to regulations


2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-27G1000-B-83



## Go

Driver On/Off [1 luminaire]


59093




Driver On/Off for Go ø75 [180mA]  
230Vac | 50/60Hz | Class II

Weight  
**0,08Kg**

Finishes  
**.99**







Driver On/Off for Go ø75 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,1Kg

Finishes  
.99







Driver DALI for Go ø75 [180mA]  
230Vac | 50/60Hz | Class II

Weight  
**0,08Kg**

Finishes  
**.99**







Driver DALI for Go ø75 [100mA]  
230Vac | 50/60Hz | Class II

Weight  
**0,08Kg**

Finishes  
**.99**

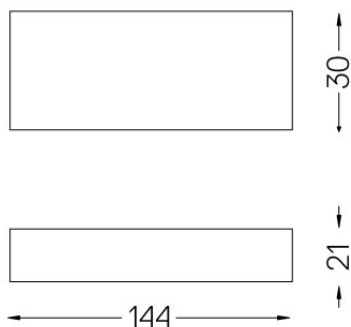





Driver PhaseCut for Go ø75  
[180mA]  
230Vac | 50/60Hz | Class II

Weight  
0,13Kg

Finishes  
.99






Driver PhaseCut for Go ø75  
[100mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99








## Go

Driver 1-10V [1 luminaire]


59099



Driver 1-10V for Go ø75 [180mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99






## Go

Driver 1-10V [1 luminaire]


59098




Driver 1-10V for Go ø75 [120mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99



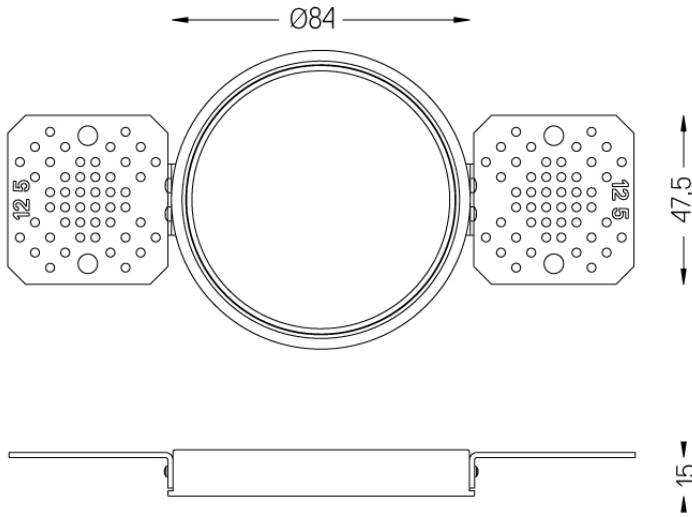

Flush accessory (12.5mm ceilings)

59069



Flush accessory Go  
For 12.5mm ceilings.

Weight  
0,11Kg

Finishes  
.99

Flush accessory (15mm ceilings)

59070

mm


Ø88



Flush accessory Go  
For 15mm ceilings.

Weight  
0,05Kg

Finishes  
.99

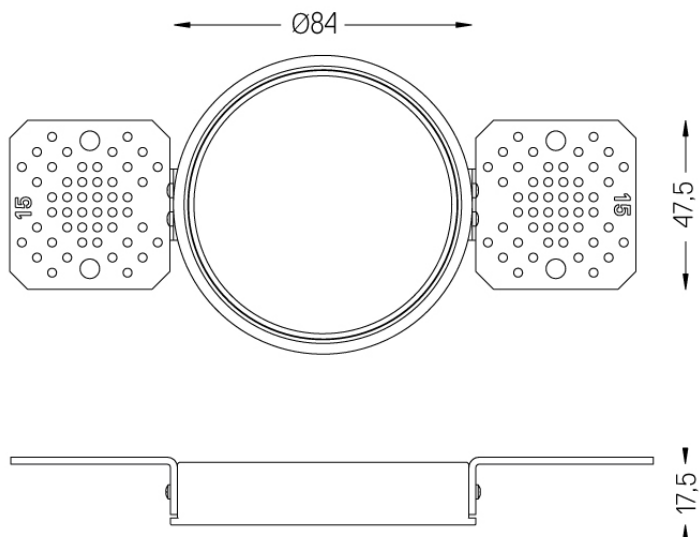



**Flush accessory (25mm ceilings)**

**59071**



Flush accessory Go  
For 25mm ceilings.

Weight  
**0,05Kg**

Finishes  
**.99**

