




Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 400mA / 200mA



	2700K	Light Source	Luminaire
<b>Power</b>	<b>14W / 7W</b>	<b>14W / 7W</b>	
<b>Flux</b>	<b>2270lm / 1135lm</b>	<b>1815lm / 910lm</b>	
<b>Efficiency</b>	<b>162lm/W</b>	<b>130lm/W</b>	
<b>LOR</b>	-	<b>80%</b>	
<b>UGR</b>	-	<b>&lt;13</b>	



Beam angle  
Flood 42°



Application



Weight


**0.37Kg**

□ mm

Ø 090

#### Finishes

- .04 Matt White
- .05 Matt Black

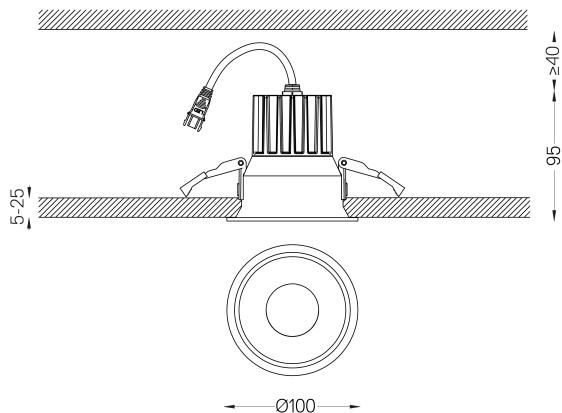

#### Mandatory

59117 Driver On/Off [400mA]

147x43x30mm

59116 Driver On/Off [200mA]

147x43x30mm

59119 Driver DALI [400mA]

144x30x21mm

59118 Driver DALI [200mA]

144x30x21mm

59121 Driver PhaseCut [400mA]

111x22x52mm

59120 Driver PhaseCut [180mA]

102x49x29mm

59123 Driver 1-10V [400mA]

163x30x21mm

59122 Driver 1-10V [200mA]

130x30x20mm

#### Optional

59137 Flush accessory (12.5mm ceilings)

180x107x16,5mm

59138 Flush accessory (15mm ceilings)

180x107x19,5mm

59154 Louvre

ø45x4mm

59155 Elliptical diffuser

ø45x4mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class E

Model Identifier BXRE-27G20FB-C-83