

O/M

Go Adjustable

6,7W / 3,7W / 530lm / 295lm / 2700K / Spot
20° / ø75mm

64772




Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.
Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP44 | 180mA / 100mA



2700K

	Light Source	Luminaire
Power	6,7W / 3,7W	6,7W / 3,7W
Flux	655lm / 365lm	530lm / 295lm
Efficiency	98lm/W	79lm/W
LOR	-	81%
UGR	-	<16



Beam angle
Spot 20°




Weight
0.21Kg

□ mm

Ø 065

Finishes

- .04 Matt White
- .05 Matt Black

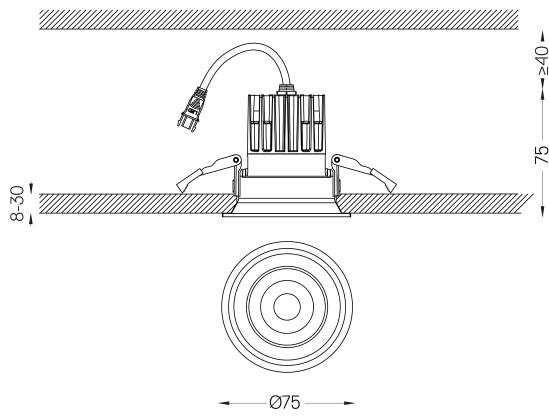

Mandatory

59093 Driver On/Off [180mA]

147x43x30mm

59092 Driver On/Off [100mA]

92x28x21mm

59095 Driver DALI [180mA]

144x30x21mm

59094 Driver DALI [100mA]

144x30x21mm

59097 Driver Phase-Cut [180mA]

102x49x29mm

59096 Driver Phase-Cut [100mA]

122x41x23mm

59099 Driver 1-10V [180mA]

130x30x20mm

59098 Driver 1-10V [120mA]

130x30x20mm

Optional

59134 Flush accessory (12.5mm ceilings)

140x82x16,5mm

59135 Flush accessory (15mm ceilings)

140x82x19,5mm

59151 Louvre

ø35x4mm

59152 Elliptical diffuser

ø35x4mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class F

Model Identifier BXRH-27G1000-B-83