

3,7W / 315lm / 3000K / Flood 60° /  
50x50mm

64801




Design: O/M  
 Ceiling-recessed luminaire made of aluminium die-cast.  
 Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
 3-step MacAdam / Power supply not included  
 IP44 | 100mA



**3000K**

	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>3,7W</b>	<b>3,7W</b>
<b>Flux</b>	<b>395lm</b>	<b>315lm</b>
<b>Efficiency</b>	<b>107lm/W</b>	<b>85lm/W</b>
<b>LOR</b>	-	<b>80%</b>
<b>UGR</b>	-	<b>&lt;22</b>



**Beam angle**  
**Flood 60°**




**Application**

**Weight**

**0.08Kg**

□ mm

45x45

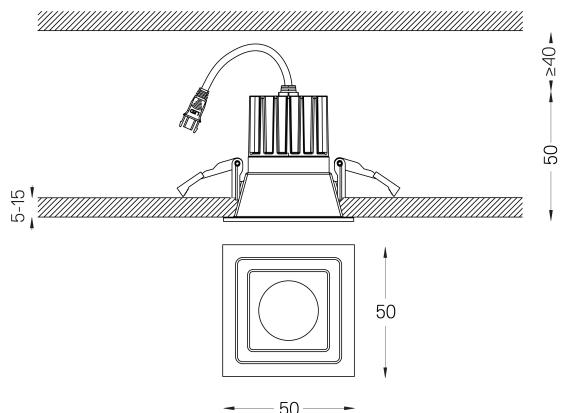

#### Finishes

- .04 Matt White
- .05 Matt Black

#### Mandatory

**59088** Driver On/Off [100mA]

138x30x21mm

**59089** Driver DALI [100mA]

144x30x21mm

**59090** Driver PhaseCut [100mA]

122x41x23mm

**59091** Driver 1-10V [120mA]

130x30x20mm

#### Optional

**59140** Flush accessory (12.5mm ceilings)

110X56X16,5mm

**59141** Flush accessory (15mm ceilings)

110X56X19,5mm

**59148** Louvre

ø25x4mm

**59149** Elliptical diffuser

ø25x4mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class F

Model Identifier BXRH-30G1000-B-83