



## Go Square

6,7W / 3,4W / 855lm / 425lm / 3500K / Flood  
48° / 75x75mm

64816




Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 200mA / 100mA



**3500K**

	<b>Light Source</b>	<b>Luminaire</b>
<b>Power</b>	<b>6,7W / 3,4W</b>	<b>6,7W / 3,4W</b>
<b>Flux</b>	<b>1055lm / 530lm</b>	<b>855lm / 425lm</b>
<b>Efficiency</b>	<b>157lm/W</b>	<b>128lm/W</b>
<b>LOR</b>	<b>-</b>	<b>81%</b>
<b>UGR</b>	<b>-</b>	<b>&lt;19</b>



**Beam angle**  
**Flood 48°**




**Application**

**Weight**  
**0.21Kg**

□ mm

65x65

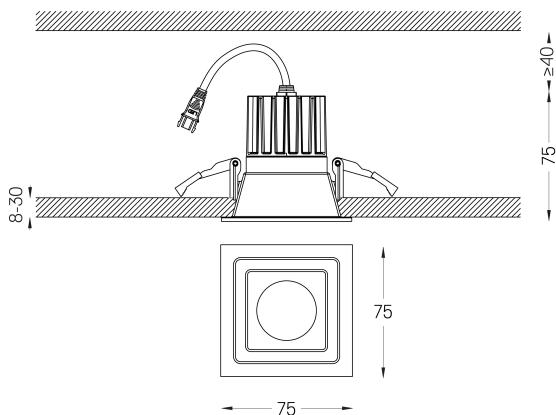

#### Finishes

- .04 Matt White
- .05 Matt Black

#### Mandatory

**59101** Driver On/Off [200mA]

147x43x30mm

**59100** Driver On/Off [100mA]

110x40x21mm

**59103** Driver DALI [200mA]

144x30x21mm

**59102** Driver DALI [100mA]

144x30x21mm

**59105** Driver PhaseCut [180mA]

102x49x29mm

**59104** Driver PhaseCut [100mA]

122x41x23mm

**59107** Driver 1-10V [200mA]

130x30x20mm

**59106** Driver 1-10V [120mA]

130x30x20mm

#### Optional

**59142** Flush accessory (12.5mm ceilings)

140x80x14mm

**59143** Flush accessory (15mm ceilings)

140x80x17mm

**59151** Louvre

ø35x4mm

**59152** Elliptical diffuser

ø35x4mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class E

Model Identifier BXRE-35G10FB-C-83