

3,7W / 300lm / 3000K / On/Off / Flood 42° /
ø50mm

64824



Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 100mA



| LED | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 3,7W | 3,7W |
| Flux | | 395lm | 300lm |
| Efficiency | | 107lm/W | 81lm/W |
| LOR | | - | 76% |
| UGR | | - | <16 |

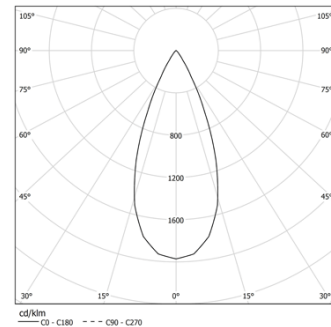

Beam angle
Flood 42°


Application



Weight
0.08Kg



Ø45

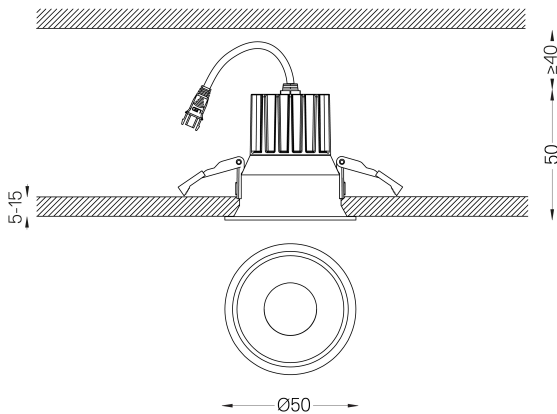

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

- 59088 Driver On/Off [100mA]
138x30x21mm
- 59089 Driver DALI [100mA]
144x30x21mm
- 59090 Driver PhaseCut [100mA]
122x41x23mm
- 59091 Driver 1-10V [120mA]
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com


The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F Model Identifier BXRH-30G1000-B-83

Driver DALI [1 luminaire]


59088



Driver On/Off for Go ø50 [100mA]
230Vac | 50/60Hz | Class II

Weight
0,1Kg


Finishes
.99

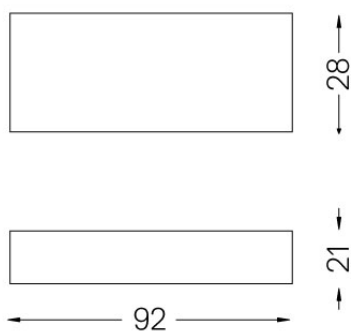



Driver DALI [1 luminaire]


59089



Driver DALI for Go ø50 [100mA]
230Vac | 50/60Hz | Class II

Weight
0,06Kg


Finishes
.99

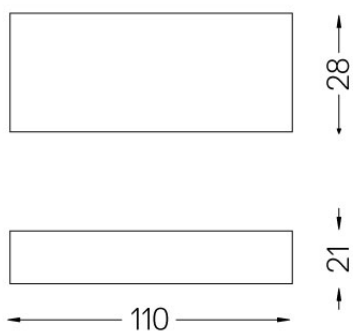



Go IP65


Driver PhaseCut [1 luminaire] **59090**



Driver PhaseCut for Go ø50
[100mA]
230Vac | 50/60Hz | Class II


Weight
0,08Kg

Finishes
.99

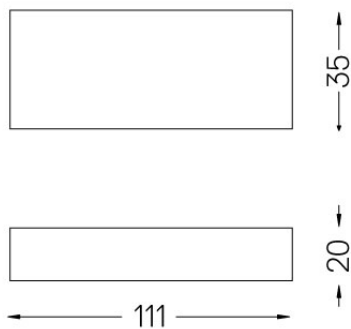

Driver 1-10V [1 luminaire]

59091



Driver 1-10V for Go ø50 [120mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99

