

# O/M

Go  
IP65

6,7W / 3,4W / 800lm / 400lm / 3000K / Flood  
48° / ø75mm

64838



Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.  
Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 200mA / 100mA



**LED** 3000K

**Light Source**

**Luminaire**


**Power** 6,7W / 3,4W

**Flux** 1055lm / 530lm

**Efficiency** 157lm/W

**LOR** -

**UGR** -



**Beam angle**  
**Flood 48°**

**Application**




**Weight**  
**0.21Kg**

□ mm

∅ 065

Finishes

- .04 Matt White
- .05 Matt Black

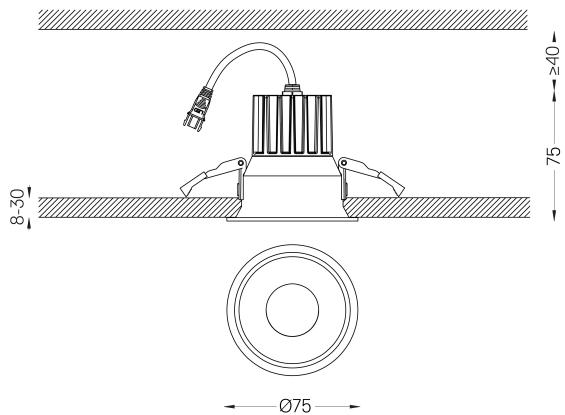

Mandatory

**59101** Driver On/Off [200mA]

147x43x30mm

**59100** Driver On/Off [100mA]

110x40x21mm

**59103** Driver DALI [200mA]

144x30x21mm

**59102** Driver DALI [100mA]

144x30x21mm

**59105** Driver PhaseCut [180mA]

102x49x29mm

**59104** Driver PhaseCut [100mA]

122x41x23mm

**59107** Driver 1-10V [200mA]

130x30x20mm

**59106** Driver 1-10V [120mA]

130x30x20mm

Optional

**59134** Flush accessory (12.5mm ceilings)

140x82x16,5mm

**59135** Flush accessory (15mm ceilings)

140x82x19,5mm

**59153** Frosted Glass

ø40x2mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class E

Model Identifier BXRE-30G10FB-C-83