

10W / 5W / 1130lm / 565lm / 2700K / On/Off
/ Spot 20° / ø100mm

64848



Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 300mA / 150mA



LED	2700K	Light Source	Luminaire
Power		10W / 5W	10W / 5W
Flux		1505lm / 755lm	1130lm / 565lm
Efficiency		151lm/W	113lm/W
LOR		-	75%
UGR		-	<10



Beam angle
Spot 20°

Application



Weight
0.37Kg



Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

- 59109** Driver On/Off [300mA]
147x43x30mm
- 59108** Driver On/Off [150mA]
147x43x30mm
- 59111** Driver DALI [300mA]
144x30x21mm
- 59110** Driver DALI [150mA]
144x30x21mm
- 59113** Driver PhaseCut [300mA]
102x51x30mm
- 59112** Driver PhaseCut [150mA]
102x49x29mm
- 59115** Driver 1-10V [300mA]
130x30x20mm
- 59114** Driver 1-10V [150mA]
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E
Model Identifier BXRE-27G10FB-C-83



Go IP65

Driver On/Off [1 luminaire]


59109



Driver On/Off for Go ø100
[300mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99

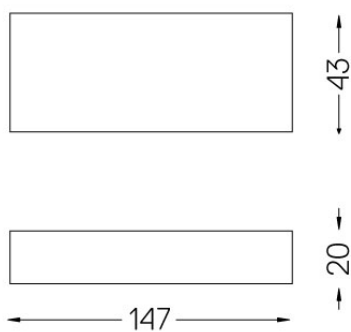




Go IP65

Driver On/Off [1 luminaire]


59108



Driver On/Off for Go ø100
[150mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99

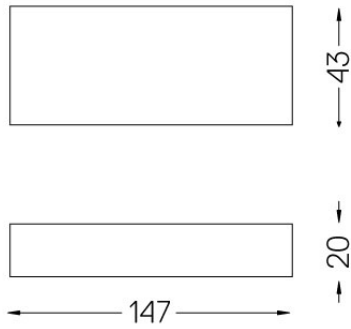



Driver DALI [1 luminaire]


59111



Driver DALI for Go ø100 [300mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99

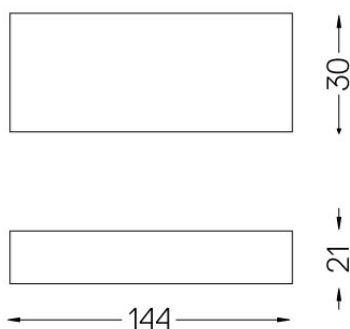



Driver DALI [1 luminaire]


59110



Driver DALI for Go ø100 [150mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99

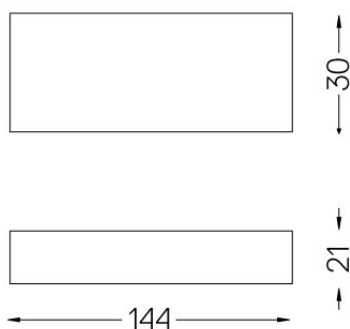




Go IP65

Driver PhaseCut [1 luminaire]


59113



Driver PhaseCut for Go ø100
[300mA]
230Vac | 50/60Hz | Class II

Weight
0,09Kg

Finishes
.99

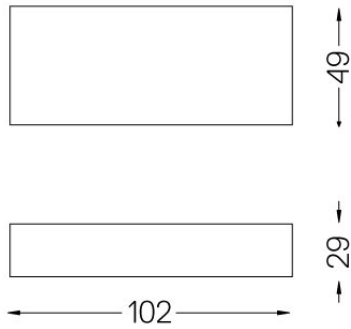




Go IP65

Driver PhaseCut [1 luminaire]


59112



Driver PhaseCut for Go ø100
[150mA]
230Vac | 50/60Hz | Class II

Weight
0,13Kg


Finishes
.99

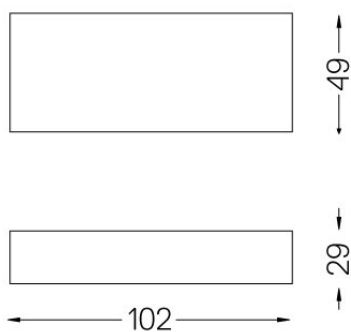



Driver 1-10V [1 luminaire]


59115



Driver 1-10V for Go ø100 [300mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99

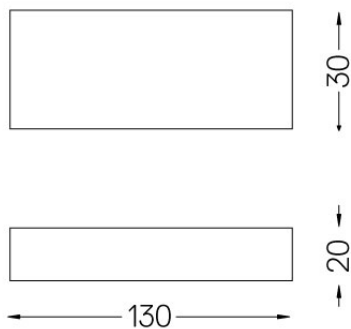

Driver 1-10V [1 luminaire]

59114



Driver 1-10V for Go ø100 [150mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

Finishes
.99

