

14W / 7W / 1725lm / 865lm / 2700K / On/Off  
/ Flood 42° / ø100mm

64849



Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 400mA / 200mA



LED	2700K	Light Source	Luminaire
Power		14W / 7W	14W / 7W
Flux		2270lm / 1135lm	1725lm / 865lm
Efficiency		162lm/W	123lm/W
LOR		-	76%
UGR		-	<13




Beam angle  
Flood 42°

Application



Weight  
0.37Kg

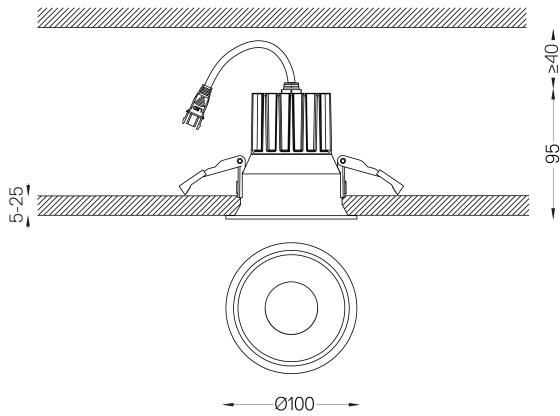

## Finishes

- .04 Matt White
- .05 Matt Black

## Mandatory

- 59117** Driver On/Off [400mA]  
147x43x30mm
- 59116** Driver On/Off [200mA]  
147x43x30mm
- 59119** Driver DALI [400mA]  
144x30x21mm
- 59118** Driver DALI [200mA]  
144x30x21mm
- 59121** Driver PhaseCut [400mA]  
111x22x52mm
- 59120** Driver PhaseCut [180mA]  
102x49x29mm
- 59123** Driver 1-10V [400mA]  
163x30x21mm
- 59122** Driver 1-10V [200mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)


The 5-year guarantee applies only when the luminaire and driver are supplied together.

## Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier BXRE-27G20FB-C-83

Driver On/Off [1 luminaire]


59117



Driver On/Off for Go ø100  
[400mA]  
230Vac | 50/60Hz | Class II


Weight  
0,08Kg

Finishes  
.99

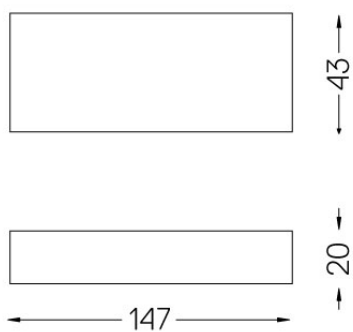

Driver On/Off [1 luminaire]


59116



Driver On/Off for Go ø100  
[200mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg


Finishes  
.99

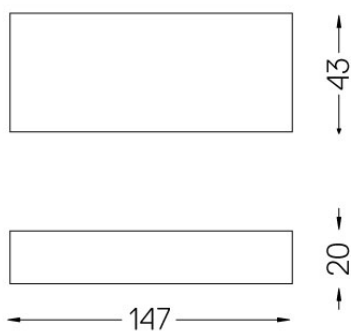



Driver DALI [1 luminaire]


59119



Driver DALI for Go ø100 [400mA]  
230Vac | 50/60Hz | Class II


Weight  
**0,08Kg**

Finishes  
**.99**

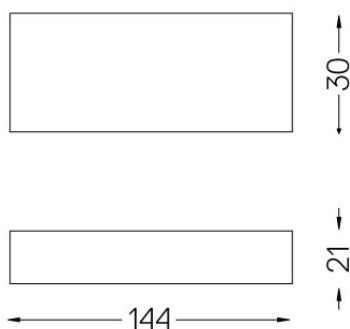

Driver DALI [1 luminaire]


59118



Driver DALI for Go ø100 [200mA]  
230Vac | 50/60Hz | Class II


Weight  
**0,08Kg**

Finishes  
**.99**

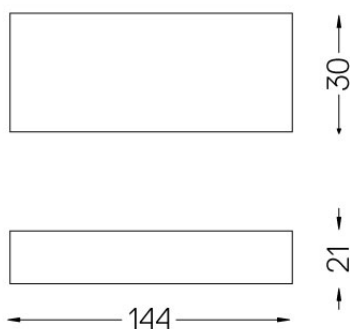


Driver PhaseCut [1 luminaire]


59121



Driver PhaseCut for Go ø100  
[400mA]  
230Vac | 50/60Hz | Class II


Weight  
0,11Kg

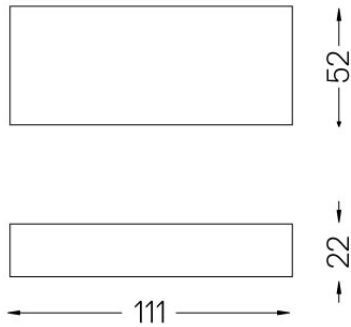



Driver PhaseCut for Go ø100  
[180mA]  
230Vac | 50/60Hz | Class II


Weight  
0,13Kg

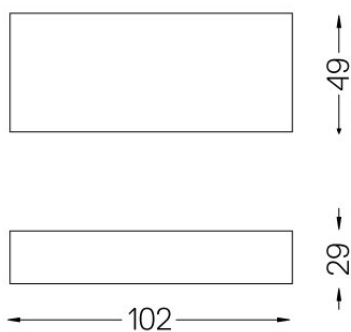




15W Driver

59123




Driver 350mA for Dot  
1 to 6 luminaires  
IP65 | 230Vac | 50/60Hz | Class II

Weight  
0,06Kg

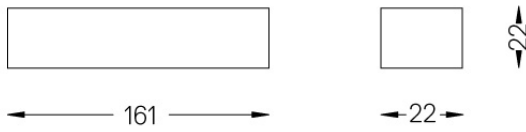

Driver 1-10V [1 luminaire]

59122



Driver 1-10V for Go ø100 [200mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

