

10W / 5W / 1155lm / 580lm / 3000K / On/Off  
/ Spot 20° / ø100mm

64851



Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 300mA / 150mA



| LED        | 3000K | Light Source   | Luminaire      |
|------------|-------|----------------|----------------|
| Power      |       | 10W / 5W       | 10W / 5W       |
| Flux       |       | 1540lm / 770lm | 1155lm / 580lm |
| Efficiency |       | 154lm/W        | 116lm/W        |
| LOR        |       | -              | 75%            |
| UGR        |       | -              | <10            |



Beam angle  
Spot 20°

Application



Weight  
0.37Kg



## Finishes

- .04 Matt White
- .05 Matt Black

## Mandatory

- 59109** Driver On/Off [300mA]  
147x43x30mm
- 59108** Driver On/Off [150mA]  
147x43x30mm
- 59111** Driver DALI [300mA]  
144x30x21mm
- 59110** Driver DALI [150mA]  
144x30x21mm
- 59113** Driver PhaseCut [300mA]  
102x51x30mm
- 59112** Driver PhaseCut [150mA]  
102x49x29mm
- 59115** Driver 1-10V [300mA]  
130x30x20mm
- 59114** Driver 1-10V [150mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.

## Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class E  
Model Identifier BXRE-30G10FB-C-83



## Go IP65

Driver On/Off [1 luminaire]


59109



Driver On/Off for Go ø100  
[300mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg

Finishes  
.99

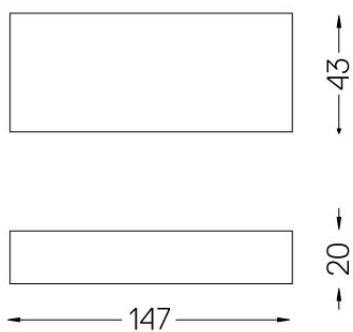




## Go IP65

Driver On/Off [1 luminaire]


59108



Driver On/Off for Go ø100  
[150mA]  
230Vac | 50/60Hz | Class II

Weight  
0,08Kg

Finishes  
.99

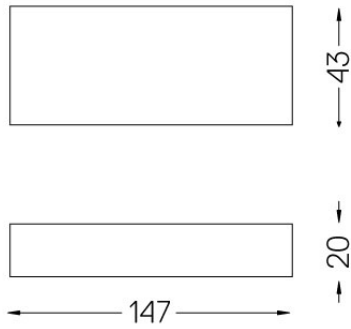



Driver DALI [1 luminaire]


59111



Driver DALI for Go ø100 [300mA]  
230Vac | 50/60Hz | Class II

Weight  
**0,08Kg**

Finishes  
**.99**

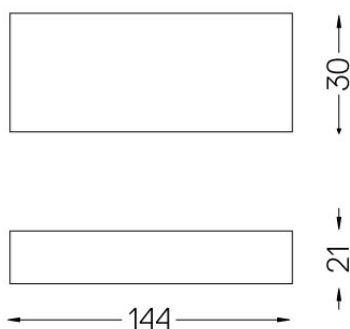



Driver DALI [1 luminaire]


59110



Driver DALI for Go ø100 [150mA]  
230Vac | 50/60Hz | Class II

Weight  
**0,08Kg**

Finishes  
**.99**

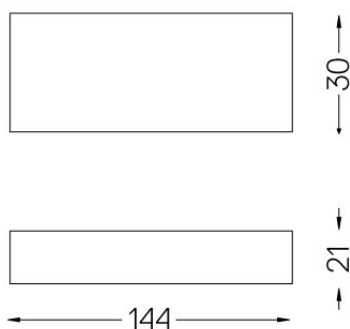




## Go IP65

Driver PhaseCut [1 luminaire]


59113



Driver PhaseCut for Go ø100  
[300mA]  
230Vac | 50/60Hz | Class II


Weight  
0,09Kg

Finishes  
.99

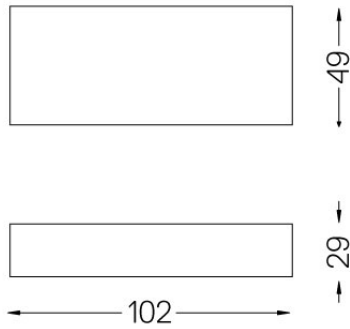

Driver PhaseCut [1 luminaire]


59112



Driver PhaseCut for Go ø100  
[150mA]  
230Vac | 50/60Hz | Class II

Weight  
0,13Kg

Finishes  
.99

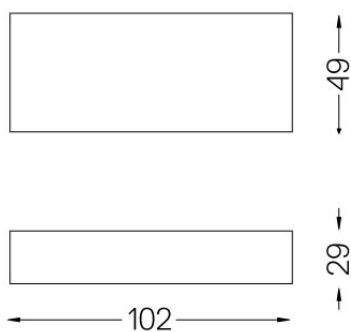






Driver 1-10V [1 luminaire]


59115



Driver 1-10V for Go ø100 [300mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

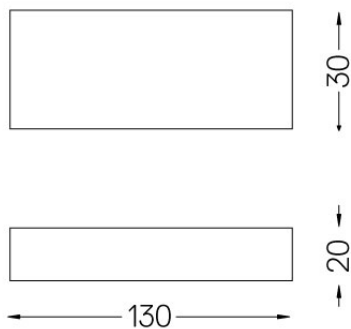

Driver 1-10V [1 luminaire]

59114



Driver 1-10V for Go ø100 [150mA]  
230Vac | 50/60Hz | Class II

Weight  
0,07Kg

Finishes  
.99

