

O/M

Go
IP65

14W / 7W / 1755lm / 880lm / 3000K / Flood
60° / ø100mm

64853




Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 400mA / 200mA



	3000K	Light Source	Luminaire
Power	14W / 7W	14W / 7W	
Flux	2320lm / 1160lm	1755lm / 880lm	
Efficiency	166lm/W	125lm/W	
LOR	-	76%	
UGR	-	<19	



Beam angle
Flood 60°



Application


Weight
0.37Kg

□ mm

Ø 090

Finishes

- .04 Matt White
- .05 Matt Black

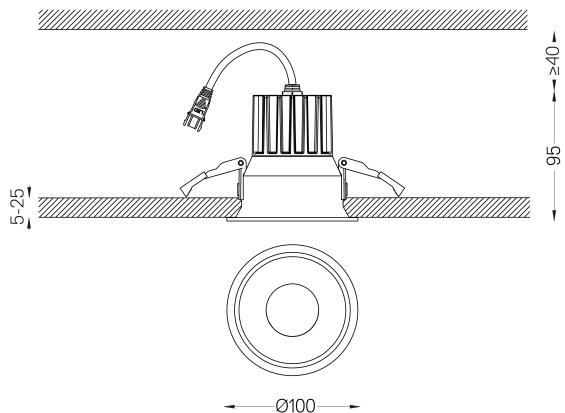

Mandatory

59117 Driver On/Off [400mA]

147x43x30mm

59116 Driver On/Off [200mA]

147x43x30mm

59119 Driver DALI [400mA]

144x30x21mm

59118 Driver DALI [200mA]

144x30x21mm

59121 Driver PhaseCut [400mA]

111x22x52mm

59120 Driver PhaseCut [180mA]

102x49x29mm

59123 Driver 1-10V [400mA]

163x30x21mm

59122 Driver 1-10V [200mA]

130x30x20mm

Optional

59137 Flush accessory (12.5mm ceilings)

180x107x16,5mm

59138 Flush accessory (15mm ceilings)

180x107x19,5mm

59156 Frosted Glass

ø52x2mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class E

Model Identifier BXRE-30G20FB-C-83