

14W / 7W / 1755lm / 880lm / 3000K / On/Off
/ Flood 60° / ø100mm

64853



Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 400mA / 200mA



| LED | 3000K | Light Source | Luminaire |
|------------|-------|-----------------|----------------|
| Power | | 14W / 7W | 14W / 7W |
| Flux | | 2320lm / 1160lm | 1755lm / 880lm |
| Efficiency | | 166lm/W | 125lm/W |
| LOR | | - | 76% |
| UGR | | - | <19 |



Beam angle
Flood 60°

Application



Weight
0.37Kg



Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

- 59117** Driver On/Off [400mA]
147x43x30mm
- 59116** Driver On/Off [200mA]
147x43x30mm
- 59119** Driver DALI [400mA]
144x30x21mm
- 59118** Driver DALI [200mA]
144x30x21mm
- 59121** Driver PhaseCut [400mA]
111x22x52mm
- 59120** Driver PhaseCut [180mA]
102x49x29mm
- 59123** Driver 1-10V [400mA]
163x30x21mm
- 59122** Driver 1-10V [200mA]
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class E
Model Identifier BXRE-30G20FB-C-83

Driver On/Off [1 luminaire]


59117



Driver On/Off for Go ø100
[400mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99

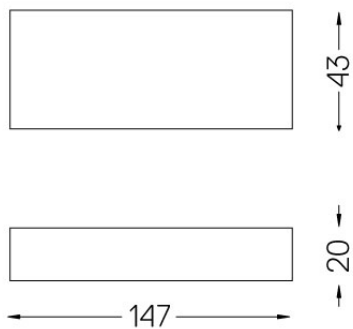

Driver On/Off [1 luminaire]


59116



Driver On/Off for Go ø100
[200mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99

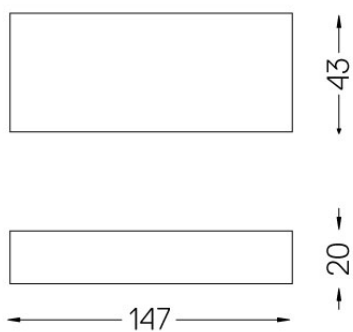



Driver DALI [1 luminaire]


59119



Driver DALI for Go ø100 [400mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg

Finishes
.99

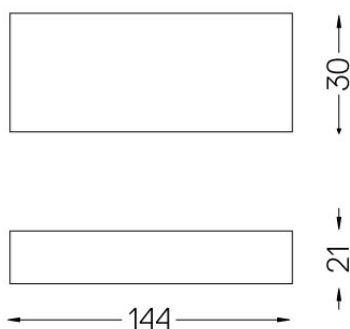



Driver DALI [1 luminaire]


59118




Driver DALI for Go ø100 [200mA]
230Vac | 50/60Hz | Class II

Weight
0,08Kg


Finishes
.99

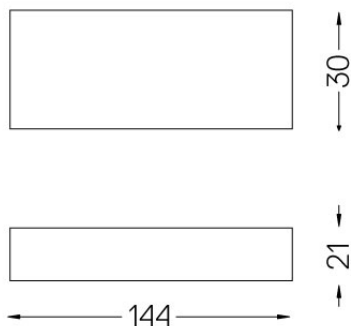




Driver PhaseCut for Go ø100
[400mA]
230Vac | 50/60Hz | Class II


Weight
0,11Kg

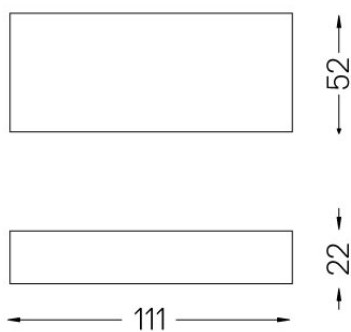




Driver PhaseCut for Go ø100
[180mA]
230Vac | 50/60Hz | Class II

Weight
0,13Kg

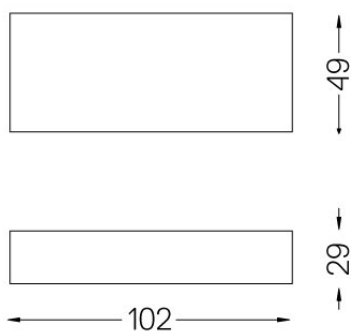


15W Driver

59123



Driver 350mA for Dot
1 to 6 luminaires
IP65 | 230Vac | 50/60Hz | Class II

Weight
0,06Kg

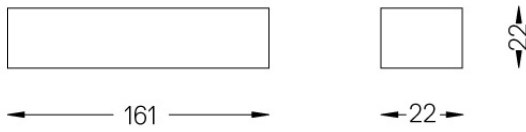

Driver 1-10V [1 luminaire]

59122



Driver 1-10V for Go ø100 [200mA]
230Vac | 50/60Hz | Class II

Weight
0,07Kg

