

6,7W / 3,7W / 500lm / 280lm / 2700K / Spot  
20° / 75x75mm

64872



Design: O/M


Ceiling-recessed luminaire made of aluminium die-cast.

Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP65 | 180mA / 100mA



| LED        | 2700K | Light Source  | Luminaire     |
|------------|-------|---------------|---------------|
| Power      |       | 6,7W / 3,7W   | 6,7W / 3,7W   |
| Flux       |       | 655lm / 365lm | 500lm / 280lm |
| Efficiency |       | 98lm/W        | 75lm/W        |
| LOR        |       | -             | 76%           |
| UGR        |       | -             | <16           |




Beam angle  
Spot 20°

Application



Weight  
0.21Kg

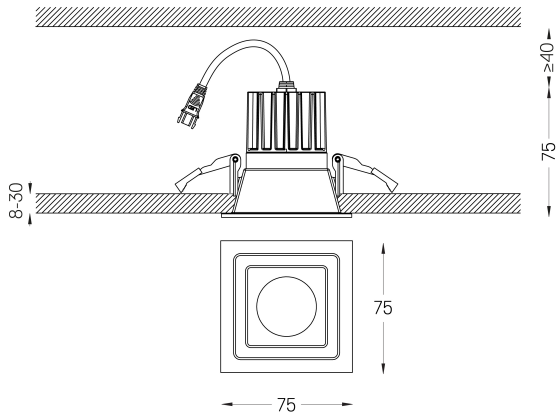

## Finishes

- .04 Matt White
- .05 Matt Black

## Mandatory

- 59093** Driver On/Off [180mA]  
147x43x30mm
- 59092** Driver On/Off [100mA]  
92x28x21mm
- 59095** Driver DALI [180mA]  
144x30x21mm
- 59094** Driver DALI [100mA]  
144x30x21mm
- 59097** Driver Phase-Cut [180mA]  
102x49x29mm
- 59096** Driver Phase-Cut [100mA]  
122x41x23mm
- 59099** Driver 1-10V [180mA]  
130x30x20mm
- 59098** Driver 1-10V [120mA]  
130x30x20mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: [support@om-light.com](mailto:support@om-light.com)

The 5-year guarantee applies only when the luminaire and driver are supplied together.

## Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class F  
Model Identifier BXRH-27G1000-B-83