


43W / 3755lm / 3500K / DALI / Wide flood  
76° / 2408mm

64905

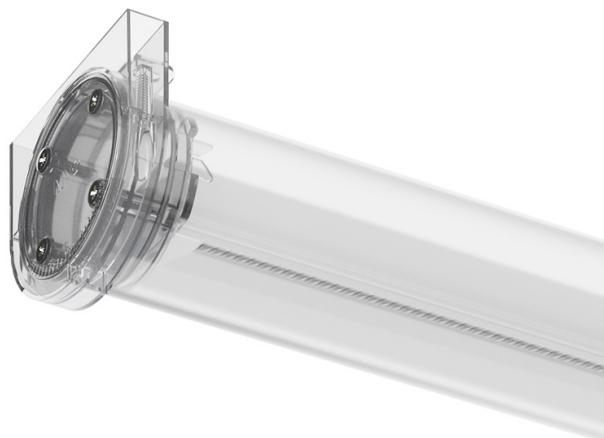

Design: Eduardo Souto de Moura  
 Surface luminaire with tubular semi frosted PMMA body with 70mm diameter.  
 Clear polycarbonate end caps with marked installation angles.  
 Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.  
 Equipped with 2m cable (5x0.75 mm<sup>2</sup>).  
 Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
 Power supply included.  
 IP44 | 230Vac | 50/60Hz



**3500K**

**Light Source**

**Luminaire**


**Power** **43W** **49,9W**

**Flux** **5520lm** **3755lm**

**Efficiency** **130lm/W** **75lm/W**

**LOR** **-** **68%**

**UGR** **-** **<16**



**Beam angle**  
**Wide flood 76°**



**Weight**

**mm**

**Finishes**

**.01 White / RAL 9010**

**Mandatory**

**59163 Surface fitting accessori (>1600mm)**

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains light sources of efficiency class E  
 Model Identifier 4053560234

