

## Tubo Pro Pendant

43W / 3755lm / 3500K / DALI / Wide flood  
76° / 2408mm

64929



Design: Eduardo Souto de Moura  
Pendant luminaire with tubular semi frosted PMMA body with 70mm diameter.

Clear polycarbonate end caps with marked installation angles.

Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.


Equipped with 2m cable (5x0.75 mm<sup>2</sup>).

Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP44 | 230Vac | 50/60Hz



LED	3500K	Light Source	Luminaire
Power		43W	49,9W
Flux		5520lm	3755lm
Efficiency		130lm/W	75lm/W
LOR		-	68%
UGR		-	<16

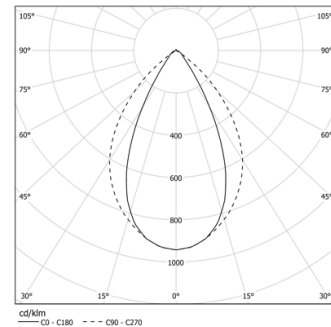


Beam angle  
**Wide flood 76°**

Application

Weight

mm

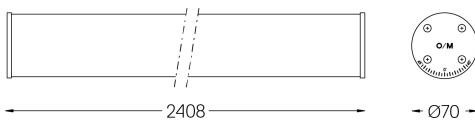

Finishes

○ .01 White / RAL 9010

Mandatory

**59147** Pendant fitting accessory (>2000mm)

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class D  
Model Identifier 4053560234