



Design: O/M + Bartenbach GmbH

Ceiling-recessed luminaire with aluminium die-cast body with electrostatic 100% polyester paint finish. Focal-lens with complex surfaces to provide a focal point through an 8mm aperture for low glare illumination.

Supplied with fermacell® plasterboard fiber recessing accessory or plasterboard.

Driver to be ordered separately.


LED CRI>90 / >50.000h, L80/B10

2-step MacAdam

IP65



LED	2700K	Light Source	Luminaire
Power	4,2W	4,2W	4,2W
Flux	370lm	265lm	265lm
Efficiency	88lm/W	63lm/W	63lm/W
LOR	-	72%	72%
UGR	-	-	-




Beam angle
WallWasher

Application



Weight
0,09Kg

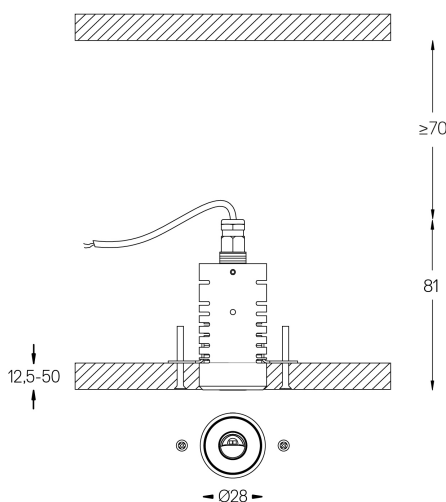

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

- 59161** Trimless accessory
ø32x35mm
- 59162** Trim accessory
ø38x75mm
- 59159** Driver On/Off [1 to 2 luminaires]
158x22x19mm
- 59160** Driver DALI [1 to 3 luminaires]
113x24x20mm

Optional

- 59013** Ceiling access hatch for drivers
365x365x13mm
- 59034** Plasterboard metal profile for Nub
250x47x18mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com