


26W / 1060lm / 2700K / DALI / Spot 17° /
1200mm

65638

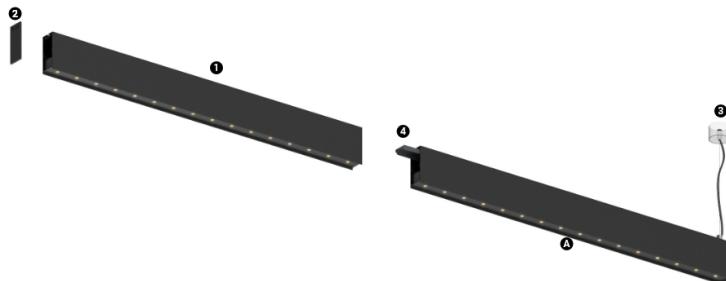

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Modules

- A inVision Module

Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




2700K

Light Source

Luminaire

Power	26W	30,7W
Flux	2410lm	1060lm
Efficiency	96lm/W	34lm/W
LOR	-	44%
UGR	-	<10



Beam angle
Spot 17°

Application



Weight
0,6Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

