


13W / 565lm / 3000K / DALI / Spot 17° /
600mm

65654

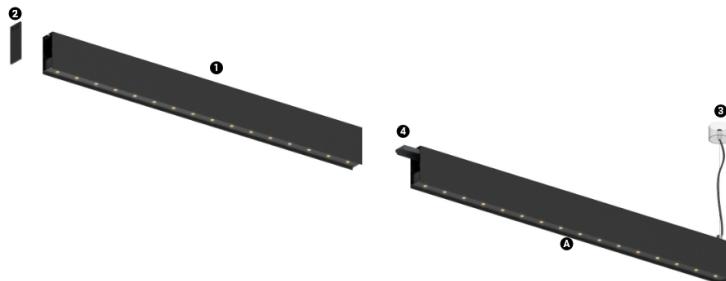

Structure
1 Profile
2 End caps
3 Fitting accessories
4 Profile coupling

Modules
A inVision Module

Design: O/M + Bartenbach GmbH
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




LED 3000K

Light Source

Luminaire

Power	13W	15,4W
Flux	1285lm	565lm
Efficiency	102lm/W	37lm/W
LOR	-	44%
UGR	-	<10



Beam angle
Spot 17°

Application



Weight
0,5Kg

mm

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

