

26W / 1250lm / 4000K / On/Off / Spot 17° /  
1200mm

65674



#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules

- A inVision Module


Design: O/M + Bartenbach GmbH

inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 26W          | 30,7W     |
| Flux       |       | 2845lm       | 1250lm    |
| Efficiency |       | 113lm/W      | 41lm/W    |
| LOR        |       | -            | 44%       |
| UGR        |       | -            | <10       |




Beam angle  
Spot 17°

#### Application



Weight  
0,6Kg

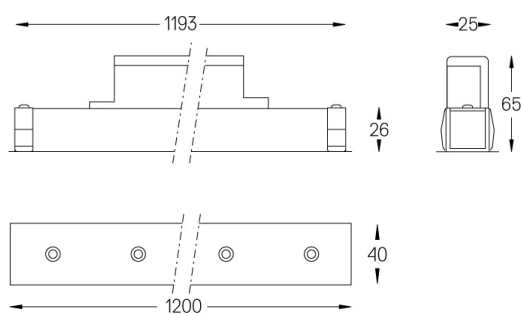

#### Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)