

6,8W / 560lm / 2700K / DALI / Diffuse /  
580mm

72006

Design: O/M

Module with opal diffuser and LED light source with good colour consistency and long operation lifespan. Available in white (.01) and black (.02)

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 48Vdc




LED	2700K	Light Source	Luminaire
Power	6,8W	6,8W	8,5W
Flux	1190lm	1190lm	560lm
Efficiency	175lm/W	175lm/W	66lm/W
LOR	-	-	47%
UGR	-	-	<25



Beam angle  
Diffuse

Application

Weight  
-

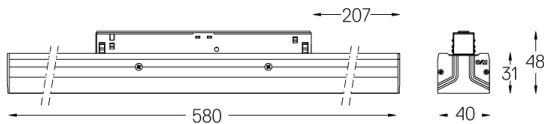

Finishes

○ .01 White / RAL 9010

Optional

70045 Modules removal tool  
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class C Model Identifier 28004771