

14W / 1120lm / 2700K / DALI / Diffuse /  
580mm

72007


Design: O/M

Module with opal diffuser and LED light source with good colour consistency and long operation lifespan. Available in white (.01) and black (.02)

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 48Vdc




LED	2700K	Light Source	Luminaire
Power	14W	17,1W	
Flux	2385lm	1120lm	
Efficiency	170lm/W	66lm/W	
LOR	-	47%	
UGR	-	<25	




Beam angle  
Diffuse

Application



Weight

-

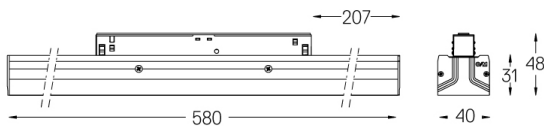

Finishes

○ .01 White / RAL 9010

Optional

70045 Modules removal tool  
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class C Model Identifier 28004771