

6,9W / 440lm / 2700K / DALI / Medium 30° /
301mm

73016

Design: O/M + Bartenbach GmbH

Module with double focus lens and housing and perforated cover plate made of aluminium with textured-paint finish.

Available in white (.01) and black (.02)


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 48Vdc




LED	2700K	Light Source	Luminaire
Power	6,9W	8,9W	8,6W
Flux	600lm	440lm	440lm
Efficiency	87lm/W	51lm/W	51lm/W
LOR	-	73%	73%
UGR	-	<10	<10




Beam angle
Medium 30°

Application



Weight

-

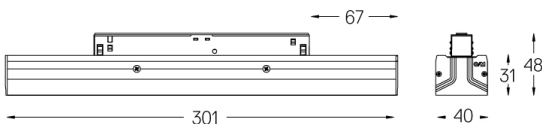

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

70045 Modules removal tool
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F Model Identifier 4053560342L