

14W / 910lm / 2700K / DALI / Flood 50° /  
301mm

73019



Design: O/M + Bartenbach GmbH

Module with double focus lens and housing and perforated cover plate made of aluminium with textured-paint finish.

Available in white (.01) and black (.02)


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 48Vdc




| LED        | 2700K  | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power      | 14W    | 14W          | 17,1W     |
| Flux       | 1200lm | 1200lm       | 910lm     |
| Efficiency | 86lm/W | 86lm/W       | 53lm/W    |
| LOR        | -      | -            | 76%       |
| UGR        | -      | -            | <16       |




Beam angle  
Flood 50°

Application



Weight

-

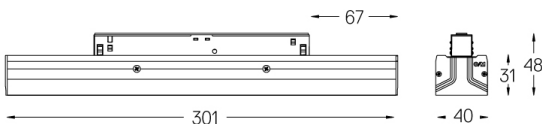

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

**70045** Modules removal tool  
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class F Model Identifier 4053560342H