

42W / 2610lm / 2700K / DALI / Medium 30° /
901mm

73025


Design: O/M + Bartenbach GmbH
Module with double focus lens and housing and perforated cover plate made of aluminium with textured-paint finish.
Available in white (.01) and black (.02)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.

IP20 | 48Vdc



LED	2700K	Light Source	Luminaire
Power	42W	42W	49,4W
Flux	3600lm	3600lm	2610lm
Efficiency	86lm/W	86lm/W	53lm/W
LOR	-	-	73%
UGR	-	-	<10




Beam angle
Medium 30°

Application



Weight

-

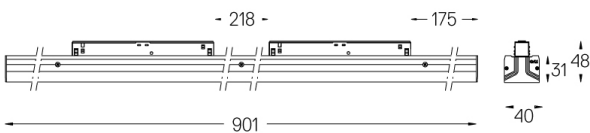

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

70045 Modules removal tool
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class F
Model Identifier 4053560342H